

# DPC-9170

## User's Manual



# Table of Contents

|                                                              |           |
|--------------------------------------------------------------|-----------|
| <b>Chapter 1. About this Manual .....</b>                    | <b>1</b>  |
| 1.1 Revision History .....                                   | 2         |
| 1.2 Copyright .....                                          | 2         |
| 1.3 Disclaimer .....                                         | 2         |
| 1.4 Conventions .....                                        | 2         |
| 1.5 Preface .....                                            | 2         |
| <b>Chapter 2. Introducing the Motherboard .....</b>          | <b>3</b>  |
| 2.1 Introduction .....                                       | 4         |
| 2.2 Main-board Physical Image .....                          | 7         |
| 2.3 Front and Rear View .....                                | 8         |
| 2.4 System I/O .....                                         | 8         |
| 2.5 System Information .....                                 | 9         |
| <b>Chapter 3. Jumper and Installation instructions .....</b> | <b>12</b> |
| 3.1 Safety Precautions .....                                 | 13        |
| 3.2 Main Board Size Diagram .....                            | 13        |
| 3.3 Schematic Diagram of Interface Location .....            | 14        |
| 3.4 Installation Steps .....                                 | 14        |
| 3.5 Memory Installation .....                                | 14        |
| 3.6 Jumper Function Settings .....                           | 15        |
| 3.7 CMOS Content Clear/Hold Settings (JBAT1) .....           | 15        |
| 3.8 Interface Description .....                              | 16        |
| <b>Chapter 4. System Utilities .....</b>                     | <b>30</b> |
| 4.1 BIOS Basic Function Settings .....                       | 31        |
| 4.2 MIAN Menu (BIOS information and time date) .....         | 32        |
| 4.3 Advance (Advanced Menu Settings) .....                   | 33        |
| 4.4 CPU Configuration .....                                  | 33        |
| 4.5 ACPI Settings .....                                      | 34        |
| 4.6 Miscellaneous Configuration .....                        | 35        |
| 4.7 Super I/O Configuration .....                            | 36        |
| 4.8 PC Health Status .....                                   | 36        |

|                                                             |                         |            |
|-------------------------------------------------------------|-------------------------|------------|
| 4.9                                                         | CSM Configuration ..... | 37         |
| 4.10                                                        | USB Configuration ..... | 37         |
| 4.11                                                        | Chipset .....           | 38         |
| 4.12                                                        | Boot .....              | 40         |
| 4.13                                                        | Security .....          | 40         |
| 4.14                                                        | Save&Exit .....         | 41         |
| <b>Chapter 5. Machine Disassembly and Replacement .....</b> |                         | <b>42</b>  |
| <b>Chapter 6. Standard Assembly Process .....</b>           |                         | <b>44</b>  |
| 6.1                                                         | LCD Assemble .....      | 45         |
| 6.2                                                         | Assemble the M/B .....  | 47         |
| <b>Chapter 7. Appendix .....</b>                            |                         | <b>49</b>  |
| 7.1                                                         | Structure diagram ..... | 错误! 未定义书签。 |
| 7.2                                                         | Material List .....     | 50         |

## Chapter 1. About this Manual

# 1.About this Manual

## 1.1 Revision History

| Date       | Version     | Chapter | Updates |
|------------|-------------|---------|---------|
| 2023/12/25 | First Draft |         |         |

## 1.2 Copyright

This publication, including all photographs, illustrations and software, is protected, under international copyright laws, with all rights reserved. Neither this manual, nor any of the material contained herein, may be reproduced without written consent of the author.

## 1.3 Disclaimer

The information in this document is subject to change without notice. The manufacturer makes no representations or warranties with respect to the contents here of and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. The manufacturer reserves the right to revise this publication and to make changes from time to time in the content hereof without obligation of the manufacturer to notify any person of such revision or changes.

## 1.4 Conventions

The following conventions are used in this manual:

|                        |                                                                                       |
|------------------------|---------------------------------------------------------------------------------------|
| <b>SCREEN MESSAGES</b> | Denotes actual messages that appear on screen.                                        |
| <b>NOTE</b>            | Gives bits and pieces of additional information related to the current topic.         |
| <b>WARNING</b>         | Alerts your to any damage that might result from doing or not doing specific actions. |
| <b>CAUTION</b>         | Gives precautionary measures to avoid possible hardware or software problem.          |
| <b>IMPORTANT</b>       | Reminds you to do specific actions relevant to the accomplishment of procedures.      |

## 1.5 Preface

Before using this information and the product it supports, please read the following general information.

This service guide provides you with all technical information relating to the basic configuration decided for Darveen's "global" product offering. To better fit local market requirements and enhance product competitiveness, your regional office may have decided to extend the functionality of a machine (e.g. Add-on card, WLAN card, SSD card, com card or extra memory capability). These localized features will not be covered in this generic service guide. In such cases, please contact your regional offices or the responsible personnel/channel to provide you with further technical details.

## Chapter 2. Introducing the Motherboard



## 2.Introducing the Motherboard

### 2.1 Introduction

Thank you for choosing the DPC-9170 industrial all-in-one machine, which uses the INTEL ITX-B100 motherboard, which uses the 10th generation Intel® Comet Lake-U I5 low-power processor with strong graphics processing and application computing capabilities. Supports dual channel SODIMM DDR4 with up to 2666MHz memory and up to 64GB, integrated with Intel® UHD Graphics core graphics card, supporting VGA, HDMI, LVDS, or EDP display output, providing 1 or 2 Realtek RTL8111H gigabit network cards, supporting 2 or 6 serial interfaces, supporting 1 M.2 slot, 1 MSATA standard slot, and Mini PCIE interface

The ITX-B100 combines stable and reliable industrial grade product performance with the advantages of an intelligent digital multimedia player, and can be widely used in industries such as advertising, education, media playback, LCD screens, traffic control, information systems, financial equipment, automotive, military, and more

01Table 1.1-1 Motherboard specification of DPC-9170

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating system</b>  | Microsoft Windows 10/11                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>processor</b>         | Integrated 10th generation Intel® I5-10210U 1.6GHz Quad Core Eight Thread Processor, TDP 15W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Chipset</b>           | SOC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Memory</b>            | 2 * DDR4 SODIMM memory slot, supporting up to 2666MHz memory and up to 64GB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Display function</b>  | <p>Integrated Intel® UHD Graphics, supports DirectX 12 OpenGL 4.5, supports 4K 1 * VGA interface, and supports a maximum resolution of: 1920X1200@60Hz</p> <p>1 * HDMI1.4 interface, supporting a maximum resolution of: 4096x2304@24Hz</p> <p>1 * Embedded Displayport, supported with a maximum resolution of: 4096X2304@60Hz 1 * Supports dual channel 24bit LVDS interface</p> <p><b>Note:</b> The LVDS interface and Embedded Displayport interface can support 12V output by jumping one out of two LVDS screen voltage, with a default value of 3.3V</p> <p>Before using LVDS, please understand its required operating voltage before setting up</p> |
| <b>network functions</b> | 1 * RTL8111H gigabit network card, supporting network wake-up and PXE functions Note: LAN2 and USB1 are optional, and can be used as two gigabit network interfaces                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Audio function</b>    | Integrated ALC897 7.1+2 channel high fidelity audio controller, supporting MIC, Line_ Out, amplifier, amplifier supports 2 Ω/5W dual channel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Expansion bus</b>     | <p>1 * Mini PCIE slot, supporting WIFI/4G module storage function</p> <p>1 * SATA3.0 hard disk interface, with a transmission speed of up to 6Gbps</p> <p>1 * MSATA slot, SSD solid-state drive supporting Intel protocol, with a transmission speed of up to 6Gbps</p>                                                                                                                                                                                                                                                                                                                                                                                      |

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                | <p>1 * M.2 slot, supporting M.2 2260/2280 NVME PCIe4/SATA adaptive standard SSD</p> <p>2 * USB3.0 interface, 2 * USB2.0 interface</p> <p>1 * HDMI interface</p> <p>1 * VGA interface</p> <p>1 * Clear CMOS button (reserved for option)</p> <p>1 * RJ45 Gigabit Network Interface (LAN2 and USB1 are optional, with 2 Gigabit networks available)</p> <p>1 * Line out (green), 1 * MIC (red)</p> <p>1 * DC12V power interface, supporting built-in interfaces for 12V power input and output</p> <p>1 * JVGA1 interface 1 * 12pin (same signal as DB15)</p> <p>1 * JHDMI interface 2 * 10pin, with the same signal as the HDMI interface</p> <p>1 * LVDS interface 2 * 15pin, supporting dual channel 24bit</p> <p>1 * LVDS backlight power interface 1 * 6pin</p> <p>1 * EDP interface 2 * 15pin, LVDS and EDP can choose one from the other through buffering, and the default LVDS interface</p> <p>6 * RS232 serial interface, optional as 2 or 6 serial ports, COM1/2 supports the 9th pin electrification function, COM2 supports RS485/422 function</p> <p>1 * PS/2 keyboard and mouse interface (red) 1 * 6Pin</p> <p>4 * USB2.0 interface 2 * 5pin, where USB1 and F_ USB3 is a choice of two, with 6 built-in USB2.0 for dual networks</p> <p>1 * Front audio interface 2 * 5pin</p> <p>1 * Front panel switch button and indicator light interface 2 * 5Pin</p> <p>1 * Hard disk power interface 1 * 4pin</p> <p>1 * Amplifier interface 1 * 4pin</p> <p>1 * 4pin DC power interface (can be used as a 12V input power interface)</p> <p>1 * SIM card holder</p> |
| <b>GPIO function</b>           | Supporting 4-way input/output GPIO function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>heat dissipation system</b> | 1 * 4pin CPU intelligent fan interface, 1 * 4pin system fan interface                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>BIOS</b>                    | 128Mb Flash ROM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Watchdog function</b>       | Support hardware reset function (256 levels, 0-255 seconds)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>operating system</b>        | <p>Windows 10/11/Linux</p> <p>Note: When installing the EFI WIN10 system on the motherboard, it can only be used on this board and cannot be copied to other motherboards for size or environment</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Main board size</b>         | 170mm x 170mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Working temperature</b>     | -10 °C~60 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Working humidity</b>        | 5-95% relative humidity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

**non condensing storage  
temperature**

-20 °C~70 °C

## 2.2 Main-board Physical Image



Figure 1: ITX-B100\_ I516L VER: 1.6 motherboard front view




Figure 2: ITX-B100\_ I516L VER: 1.6 motherboard I/O diagram

## 2.3 Front and Rear View



## 2.4 System I/O :



|             |         |        |         |         |        |        |         |         |             |        |                 |             |
|-------------|---------|--------|---------|---------|--------|--------|---------|---------|-------------|--------|-----------------|-------------|
| A           | B       | C      | D       | E       | F      | G      | H       | I       | J           | K      | L               | M           |
| A: DC-input | B: COM1 | C: USB | D: COM2 | E: HDMI | F: VGA | G: USB | H: LAN1 | I: LAN2 | J: Line-out | K: MIC | L: Power Switch | M: Remot SW |

## 2.5 System Information

01Table 1.1-1 Product specification of DPC-9170

| Display           | DPC-9170-J6412                                                            | DPC-9170-6200U                           | DPC-9170-10210U                           | DPC-9170-10710U                           |
|-------------------|---------------------------------------------------------------------------|------------------------------------------|-------------------------------------------|-------------------------------------------|
| Size              | 17 inch                                                                   |                                          |                                           |                                           |
| Touch Type        | Projected capacitive multi touch<br>5-wire resistive touch                |                                          |                                           |                                           |
| Transmittance     | 87% (capacitive) / 80% (resistive)                                        |                                          |                                           |                                           |
| Control Interface | USB                                                                       |                                          |                                           |                                           |
| Surface Hardness  | ≥7H /≥3H                                                                  |                                          |                                           |                                           |
| Resolution        | 1280 x 1024                                                               |                                          |                                           |                                           |
| Luminance         | 250 nits                                                                  |                                          |                                           |                                           |
| Contrast Ratio    | 1000: 1                                                                   |                                          |                                           |                                           |
| View Angles       | 89 (left), 89 (right), 89 (up), 89 (down)                                 |                                          |                                           |                                           |
| LED Lifetime      | 30,000 hrs                                                                |                                          |                                           |                                           |
| Color             | 16.7M                                                                     |                                          |                                           |                                           |
| System            |                                                                           |                                          |                                           |                                           |
| CPU               | Intel® Celeron® J6412(2.0 GHz) processor                                  | Intel® Core™ i5-6200U(2.3 GHz) processor | Intel® Core™ i5-10210U(1.6 GHz) processor | Intel® Core™ i7-10710U(1.1 GHz) processor |
| Memory            | 1x SO-DIMM DDR4-3200MHz, up to 16GB                                       | 2x SO-DIMM DDR3-1600MHz, up to 16GB      | 2x SO-DIMM DDR4-2666MHz, up to 32GB       | 2x SO-DIMM DDR4-2666MHz, up to 32GB       |
| Storage           | 1x 2.5" SATA HDD/SSD (optional)<br>1x full length Mini PCIe for mSATA SSD |                                          |                                           |                                           |
| I/O Ports         |                                                                           |                                          |                                           |                                           |
| USB               | 2x USB 3.0, 2x USB 2.0                                                    |                                          |                                           |                                           |

|                     |                                                                          |     |                    |
|---------------------|--------------------------------------------------------------------------|-----|--------------------|
| Serial              | 2x COM (COM1 supports RS-232, COM2 supports RS-232/422/485)              |     |                    |
| Ethernet            | 2x GbE LAN                                                               |     |                    |
| Display             | 1x HDMI, 1x VGA                                                          |     |                    |
| SIM Card Slot       | 1x SIM slot for 4G (optional)                                            |     |                    |
| Antenna             | 2x SMA antenna holes                                                     |     |                    |
| Expansion Slot      |                                                                          |     |                    |
| Mini PCIe           | 1x full length Mini PCIe for Wi-Fi<br>1x full length Mini PCIe for mSATA |     |                    |
| RF Communication    |                                                                          |     |                    |
| Wi-Fi               | Mini PCIe expansion (optional)                                           |     |                    |
| Cellular            | Mini PCIe expansion (optional)                                           |     |                    |
| Bluetooth           | Mini PCIe expansion (optional)                                           |     |                    |
| Audio               |                                                                          |     |                    |
| Audio               | Mic in, line out                                                         |     |                    |
| Speaker             | 2Ω5W speaker (optional)                                                  |     |                    |
| Power               |                                                                          |     |                    |
| Bution              | YES                                                                      |     |                    |
| Remote Power On/Off | 1x Remote switch connector                                               |     |                    |
| DC Input            | 12VDC (9-36VDC optional)                                                 |     |                    |
| Power Connector     | M8                                                                       |     |                    |
| Power Consumption   | 23W                                                                      | 29W |                    |
| Power Adaptor       | AC-DC, 12V@5A, 60W                                                       |     | AC-DC, 12V@7A, 84W |
| Operating System    |                                                                          |     |                    |

|                        |                                                                                         |                       |
|------------------------|-----------------------------------------------------------------------------------------|-----------------------|
| Windows                | Windows 7, Windows 10                                                                   | Windows 7, Windows 10 |
| Mechanical             |                                                                                         |                       |
| Dimensions (W x D x H) | 528 x 326 x 66 mm (20.7 x 12.8 x 2.6 inches)                                            |                       |
| Weight (N.W.)          | 7.9 kg (17.4 lbs)                                                                       |                       |
| Mounting               | Panel mount, wall mount bracket VESA 100                                                |                       |
| Material               | Aluminum alloy panel, all-metal chassis                                                 |                       |
| Environment            |                                                                                         |                       |
| Operating Temperature  | -10 to 50°C (14 to 122°F)                                                               |                       |
| Storage Temperature    | -20 to 60°C (-4 to 140°F)                                                               |                       |
| Relative Humidity      | 10% to 95% @ 40°C (104°F), non-condensing                                               |                       |
| Vibration              | 5-500Hz, 0.026 G²/Hz, 2.16 Grms, X, Y, Z, 1 hour per axis                               |                       |
| IP Rating              | IP65 compliant (for front panel)                                                        |                       |
| Certification          |                                                                                         |                       |
| EMC                    | CE, FCC                                                                                 |                       |
| Packing List           |                                                                                         |                       |
| Packing                | 1x DPC-9170<br>1x AC-DC power adapter<br>10x panel mounting buckles<br>1x warranty card |                       |

## Chapter 3. Jumper and Installation Instructions



## 3. Jumper and Installation instructions

### 3.1 Safety Precautions

1. Follow these safety precautions when installing the motherboard
2. Wear a grounding strap attached to a grounded device to avoid damage from static electricity
3. Discharge static electricity by touching the metal case of a safely grounded object before working on the motherboard
4. Leave components in the static-proof bags they came in
5. Hold all circuit boards by the edges. Do not bend circuit boards

### 3.2 Main Board Size Diagram

The following diagram shows the position and size of the front interface of ITX-B100. Care must be taken during the installation of equipment. For some components, if installed incorrectly, they will not function properly.


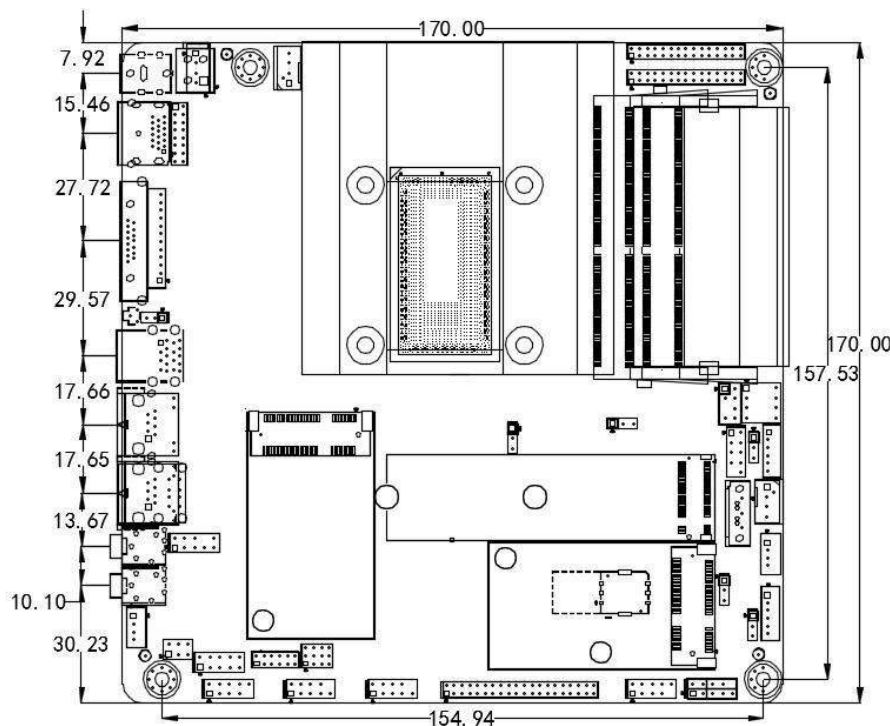


Figure 1 3.2 Main board size diagram

Attention:

1. Please make sure to choose appropriate screws and use the correct installation method, otherwise it may damage the motherboard.
2. How to identify the first pin of the jumper or interface, observe the text mark next to the plug and socket, which will be represented by a triangle symbol or "1" or bold lines; Look at the solder pad on the back. The square solder pad is the first pin. When inserting the device and connecting wires, pay attention to distinguishing the first pin, otherwise it may damage the motherboard

### 3.3 Schematic Diagram of Interface Location

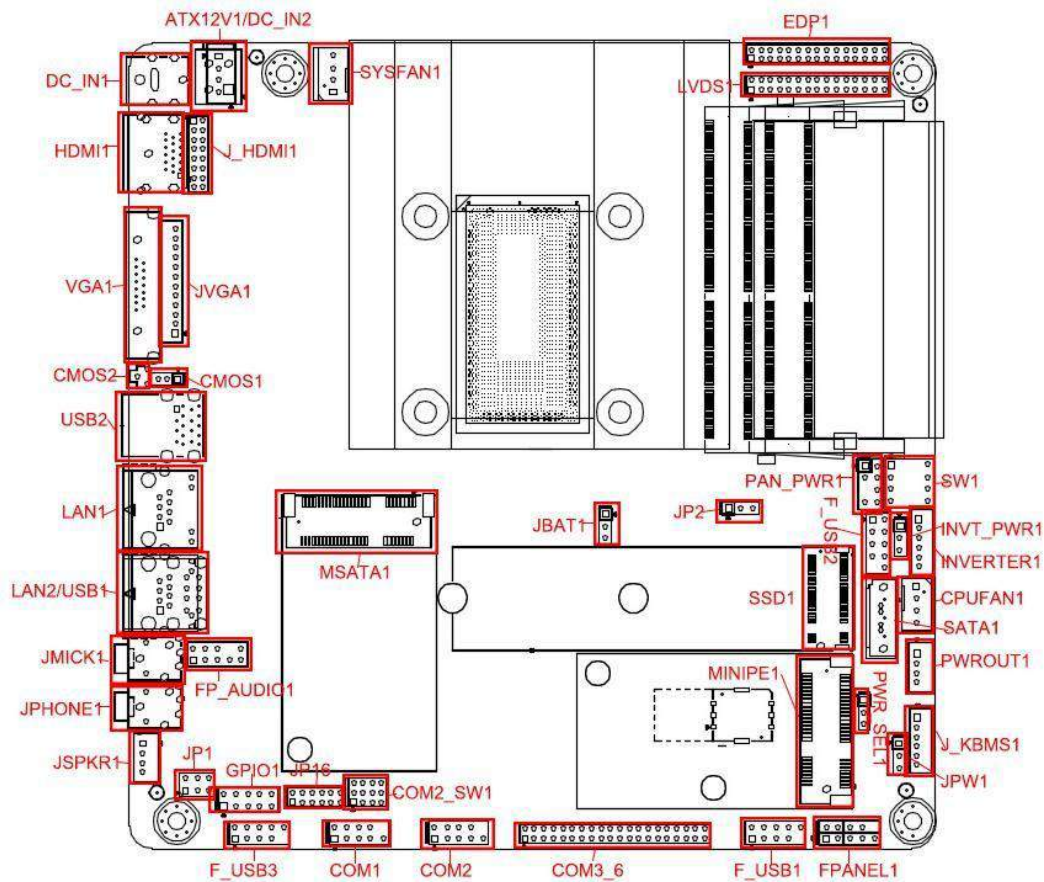

Reminder:

The working voltage of LVDS screen supports 3.3V, 5V, and 12V voltage outputs, with a default value of 3.3V. Before using LVDS, please understand its required rated working voltage before setting it.

Reminder:

How to identify alarm sounds: (A long beep indicates a system memory error; a short 'beep' indicates a power on sound).

### 3.4 Installation Steps

Please follow these steps to assemble your computer:

1. Refer to the user manual and adjust all Jumpers on the ITX-B100 correctly.
2. Install other expansion cards.
3. Connect all signal lines, cables, panel control lines, and power supplies.
4. Start the computer and complete the setup of the BIOS program.

### 3.5 Memory Installation

This motherboard is equipped with 2 SO-DIMM slots. Please note the following two points when installing a memory module:

During installation, align the notch of the memory module with the notch of the slot and then firmly insert it.

When selecting a memory module, you must select a memory module that supports the specifications of this motherboard.

### 3.6 Jumper Function Settings

Before installing hardware devices, please set the corresponding jumpers according to the table below according to your needs.

Tip: How to identify the first pin of the jumper or interface, observe the text mark next to the plug and socket, and use "1" or add


Thick lines or triangular symbols represent; Look at the solder pad on the back, the square solder pad is the first pin; All jumper pins There is a white arrow on either side.

### 3.7 CMOS Content Clear/Hold Settings (JBAT1)

CMOS is powered by a button battery on the board. Clearing CMOS will permanently erase the previous system settings and set them to the original (factory set) system settings.

The steps are:

- (1) Turn off the computer and disconnect the power supply;
- (2) Short circuit "JBAT1" pins 2 and 3 using a jumper cap for 5-6 seconds, then restore to 1-2; (3) Press the "Delete" button on the keyboard to enter the BIOS interface when turning on the computer;
- (4) Enter the BIOS interface and press the "F9" key and "Enter" to reload the optimal default value;
- (5) Press F10 to save and exit the settings.needs.

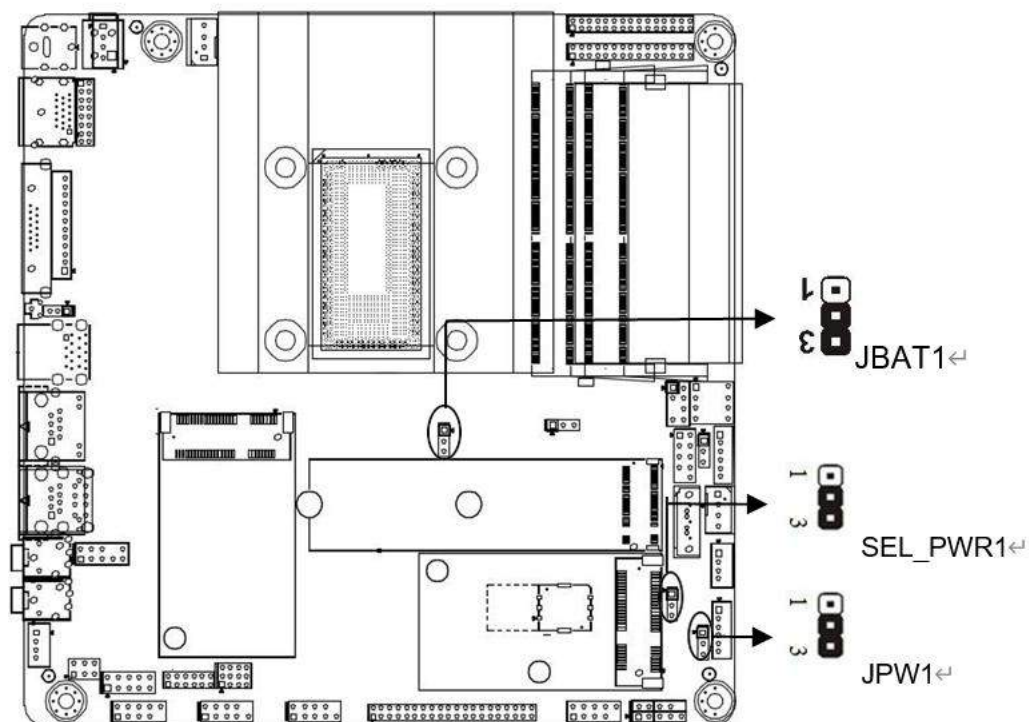

(JBAT1)

|                   |                                                                    |
|-------------------|--------------------------------------------------------------------|
| Jumper            | JBAT1                                                              |
| 1-2 short circuit | Normal working state                                               |
| 2-3 short circuit | Clear CMOS content and restore all BIOS settings to factory values |

JPW1

|                   |                                                          |
|-------------------|----------------------------------------------------------|
| Jumper            | JPW1                                                     |
| 1-2 short circuit | Turn off the automatic start function for incoming calls |
| 2-3 short circuit | Turn on the automatic start function for incoming calls  |

4G module voltage setting (PWR\_SEL1)

|                   |          |
|-------------------|----------|
| Jumper            | PWR_SEL1 |
| 1-2 short circuit | 3.3V     |
| 2-3 short circuit | 3.8V     |


### 3.8 Interface Description

Please read this manual carefully before connecting external connectors to avoid damage to the motherboard!

#### 3.8.1 SATA interface (SATA1, PWROUT1)

Equipped with a built-in 7 Pin SATA3.0 interface, with a transmission rate of 6Gbps

Built in 1 1x4Pin hard drive power interface

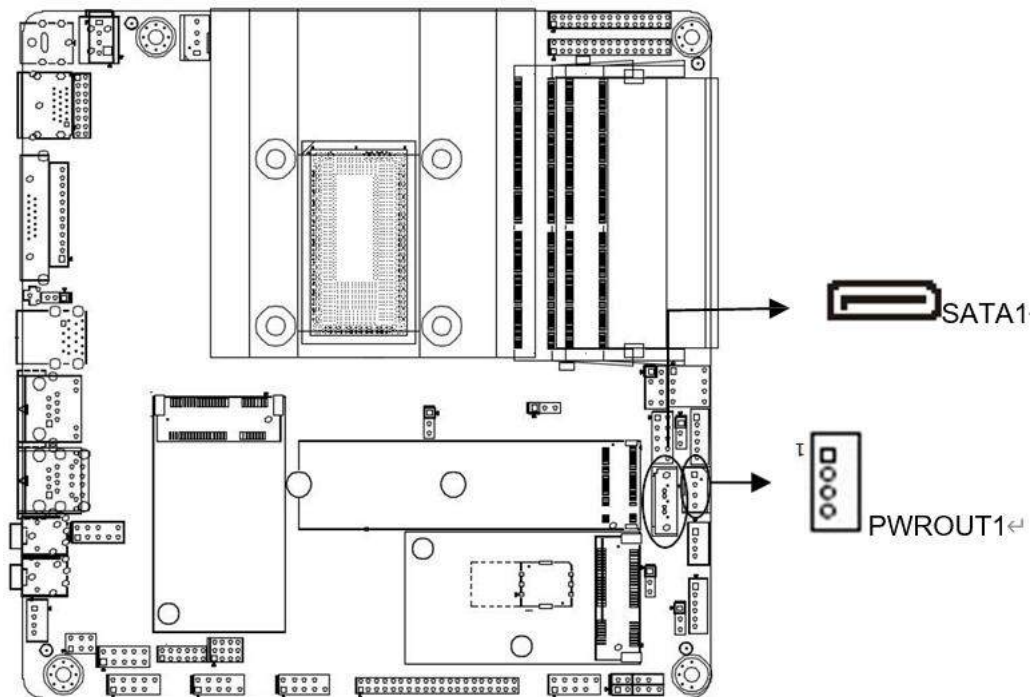

## SATA1

| PIN | signal   |
|-----|----------|
| 1   | GND      |
| 2   | SATA_TXP |
| 3   | SATA_TXN |
| 4   | GND      |
| 5   | SATA_RXN |
| 6   | SATA_RXP |
| 7   | GND      |


## PWROUT1

| PIN | signal |
|-----|--------|
| 1   | +12V   |
| 2   | GND    |
| 3   | GND    |
| 4   | +5V    |

Reminder: The first pin of the hard drive power supply interface PWROUT1 is for +12V output, and the fourth pin is for +5V output. When using it, our standard power cord must be used to avoid burning the hard drive

### 3.8.2 Serial interfaces (COM1, COM2, COM3-6, JP16, COM2SW1, JP1)

This board can provide up to 6 RS232 serial interfaces, of which COM1/COM2 is 2 \* 5pin and COM3-6 is 2 \* 20pin. You can turn on or off the serial interface in the BIOS settings option, and you can choose its interrupt IRQ and I/O address. Among them, COM1/COM2 supports the 9th pin power function, COM2 also supports the RS485/422 function, and COM2's RS485/422 function is set through jumpers. Please refer to JP1 and COM2 for details\_ SW1 Jump Settings

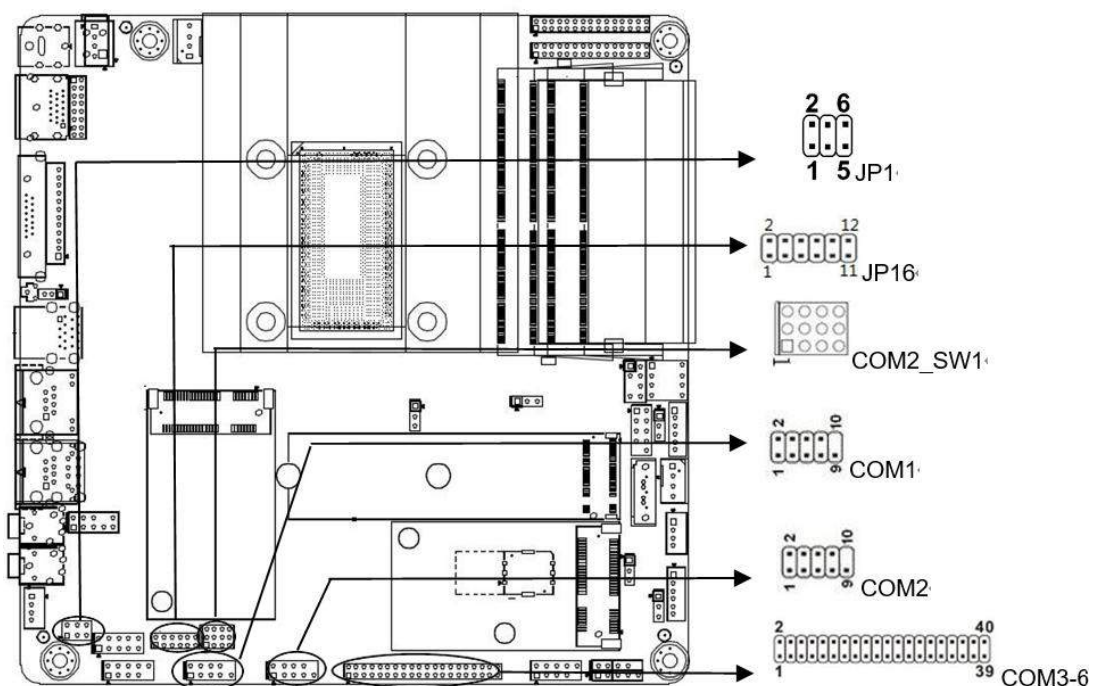

## COM1、COM2

| Pin | signal | Pin | signal |
|-----|--------|-----|--------|
| 1   | DCD    | 2   | RXD    |
| 3   | TXD    | 4   | DTR    |
| 5   | GND    | 6   | DSR    |
| 7   | RTS    | 8   | CTS    |
| 9   | RI     | 10  | NC     |

## COM3~6

| Pin | signal   | Pin | signal   |
|-----|----------|-----|----------|
| 1   | COM3_DCD | 2   | COM3_RXD |
| 3   | COM3_TXD | 4   | COM3_DTR |
| 5   | GND      | 6   | COM3_DSR |
| 7   | COM3_RTS | 8   | COM3_CTS |
| 9   | COM3-RI  | 10  | NC       |
| 11  | COM4_DCD | 12  | COM4_RXD |
| 13  | COM4_TXD | 14  | COM4_DTR |
| 15  | GND      | 16  | COM4_DSR |
| 17  | COM4_RTS | 18  | COM4_CTS |
| 19  | COM4-RI  | 20  | NC       |
| 21  | COM5_DCD | 22  | COM5_RXD |
| 23  | COM5_TXD | 24  | COM5_DTR |
| 25  | GND      | 26  | COM5_DSR |
| 27  | COM5_RTS | 28  | COM5_CTS |
| 29  | COM5-RI  | 30  | NC       |
| 31  | COM6_DCD | 32  | COM6_RXD |
| 33  | COM6_TXD | 34  | COM6_DTR |
| 35  | GND      | 36  | COM6_DSR |
| 37  | COM6_RTS | 38  | COM6_CTS |
| 39  | COM6-RI  | 40  | NC       |

**JP16**

| Pin                 | function (JP16) |      |
|---------------------|-----------------|------|
| 1-2 short circuit   | RS232           | COM1 |
| 3-4 short circuit   | +5V             |      |
| 5-6 short circuit   | +12V            |      |
| 7-8 short circuit   | RS232           | COM2 |
| 9-10 short circuit  | +5V             |      |
| 11-12 short circuit | +12V            |      |

**COM2\_SW1 (COM2 RS485/422)**

| Pin                             | function  |
|---------------------------------|-----------|
| 2-3,5-6,8-9,11-12 short circuit | RS232     |
| 1-2,4-5,7-8,10-11 short circuit | RS485/422 |

**JP1(COM2 RS485/422 )**

| pin               | COM2  |
|-------------------|-------|
| 1-2 short circuit | RS232 |
| 3-4 short circuit | RS485 |
| 5-6 short circuit | RS422 |

**COM2 RS485**

| Pin | signal | Pin | signal |
|-----|--------|-----|--------|
| 1   | DATA+  | 2   | DATA-  |
| 3   | NC     | 4   | NC     |
| 5   | GND    | 6   | NC     |
| 7   | NC     | 8   | NC     |
| 9   | NC     | 10  | NC     |

**COM2 RS485**

| Pin | signal | Pin | signal |
|-----|--------|-----|--------|
| 1   | T/R+   | 2   | T/R-   |
| 3   | RXD+   | 4   | RXD-   |
| 5   | GND    | 6   | NC     |
| 7   | NC     | 8   | NC     |
| 9   | NC     | 10  | NC     |

### 3.8.3 Display interface(VGA1, JVGA1, HDMI1, J\_HDMI1, EDP, LVDS1, INVERTER1, INVT\_PWR1, JP2, PAN\_PWR1, SW1)


The motherboard provides 1 standard VGA interface and 1 standard HDMI interface

Built in 1 1 \* 12pin JVGA interface, 1 2 \* 8pin JHDMI interface,

Provide 1 LVDS interface that supports dual channel 24bit and 1 Embedded Display port interface

Note: VGA1 and JVGA1 are the same signal, while HDMI1 and JHDMI1 are the same signal

The LVDS interface and EDP interface are either selected through phishing, and the default LVDS interface

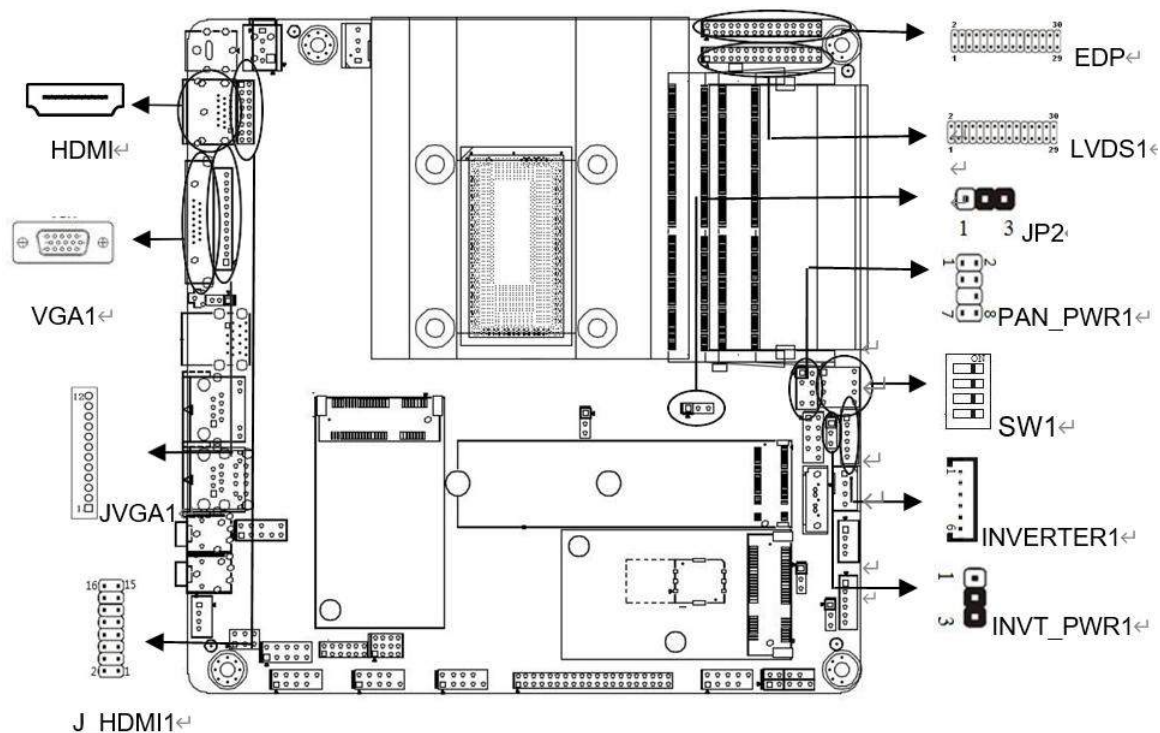

#### VGA1

| Pin | signal | Pin | signal  |
|-----|--------|-----|---------|
| 1   | Red    | 2   | Green   |
| 3   | Blue   | 4   | NC      |
| 5   | GND    | 6   | GND     |
| 7   | GND    | 8   | GND     |
| 9   | NC     | 10  | GND     |
| 11  | NC     | 12  | DDCDATA |
| 13  | HSYNC  | 14  | VSYSN   |
| 15  | DDCCLK |     |         |

## JVGA1

| Pin | signal  | Pin | signal  |
|-----|---------|-----|---------|
| 1   | NC      | 2   | VSYNC   |
| 3   | HSYNC   | 4   | GND     |
| 5   | R       | 6   | GND     |
| 7   | G       | 8   | GND     |
| 9   | B       | 10  | GND     |
| 11  | DDC_SDA | 12  | DDC_SCL |

## HDMI1

| Pin | signal            | Pin | signal            |
|-----|-------------------|-----|-------------------|
| 1   | TMDS Data2+       | 2   | TMDS Data2 Shield |
| 3   | TMDS Data2-       | 4   | TMDS Data1+       |
| 5   | TMDS Data1 Shield | 6   | TMDS Data1-       |
| 7   | TMDS Data0+       | 8   | TMDS Data0 Shield |
| 9   | TMDS Data0-       | 10  | TMDS Clock+       |
| 11  | TMDS Clock Shield | 12  | TMDS Clock-       |
| 13  | Reserved(N.C.)    | 14  | Reserved(N.C.)    |
| 15  | SCL               | 16  | SDA               |
| 17  | CEC Ground        | 18  | +5V Power         |
| 19  | Hot Plug Detect   |     |                   |

## J\_HDMI1

| Pin | signal      | Pin | signal          |
|-----|-------------|-----|-----------------|
| 1   | TMDS Data2+ | 2   | SCL             |
| 3   | TMDS Data2- | 4   | SDA             |
| 5   | TMDS Data1+ | 6   | NC              |
| 7   | TMDS Data1- | 8   | Hot Plug Detect |
| 9   | TMDS Data0+ | 10  | +5V Power       |
| 11  | TMDS Data0- | 12  | GND             |
| 13  | TMDS Clock+ | 14  | GND             |
| 15  | TMDS Clock- | 16  | GND             |

## EDP1

| Pin | signal     | Pin | signal     |
|-----|------------|-----|------------|
| 1   | PVDD       | 2   | PVDD       |
| 3   | NC         | 4   | NC         |
| 5   | EDP_TX0+   | 6   | EDP_TX0-   |
| 7   | GND        | 8   | GND        |
| 9   | EDP_TX1+   | 10  | EDP_TX1-   |
| 11  | GND        | 12  | GND        |
| 13  | EDP_TX2+   | 14  | EDP_TX2-   |
| 15  | GND        | 16  | GND        |
| 17  | EDP_TX3+   | 18  | EDP_TX3-   |
| 19  | GND        | 20  | GND        |
| 21  | EDP_AUX+   | 22  | EDP_AUX-   |
| 23  | GND        | 24  | HPD_DET    |
| 25  | BKLT_PWM   | 26  | BKLT_EN    |
| 27  | GND        | 28  | GND        |
| 29  | INVERT_PWR | 30  | INVERT_PWR |

## LVDS1

| Pin | signal     | Pin | signal     |
|-----|------------|-----|------------|
| 1   | LCDVDD     | 2   | LCDVDD     |
| 3   | LCDVDD     | 4   | NC         |
| 5   | GND        | 6   | GND        |
| 7   | LVDS_A0-   | 8   | LVDS_A0+   |
| 9   | LVDS_A1-   | 10  | LVDS_A1+   |
| 11  | LVDS_A2-   | 12  | LVDS_A2+   |
| 13  | GND        | 14  | GND        |
| 15  | LVDSA_CLK- | 16  | LVDSA_CLK+ |
| 17  | LVDS_A3-   | 18  | LVDS_A3+   |
| 19  | LVDS_B0-   | 20  | LVDS_B0+   |
| 21  | LVDS_B1-   | 22  | LVDS_B1+   |
| 23  | LVDS_B2-   | 24  | LVDS_B2+   |
| 25  | GND        | 26  | GND        |
| 27  | LVDSB_CLK- | 28  | LVDSB_CLK+ |
| 29  | LVDS_B3-   | 30  | LVDS_B3+   |

The voltage of different LCD screens may vary. This board provides three types of screen working voltage options: 3.3V, 5V, and 12V, as well as 5V and 12V screen backlight power supply voltage options. Before using LVDS, please understand its required rated working voltage. When the selected LCD voltage is consistent with the used LCD screen voltage, the LCD screen can display normally. The setting method is as follows:

## INVERTER1(Backlight power supply interface)

| Pin | signal                       |
|-----|------------------------------|
| 1   | 12V/5V(INV_PWR1 Setting)     |
| 2   | 12V/5V(INV_PWR1 Setting)     |
| 3   | Backlight enable             |
| 4   | Backlight brightness control |
| 5   | GND                          |
| 6   | GND                          |

## INV\_PWR1 (screen backlight power supply) setting

| Pin       | INVT_PWR1 |
|-----------|-----------|
| 1-2 short | 12V       |
| 2-3 short | 5V        |


## PAN\_PWR1 (screen working voltage) setting

| Pin       | PAN_PWR1 |
|-----------|----------|
| 1-2 short | 3.3V     |
| 3-4 short | 5V       |
| 5-6 short | NC       |
| 7-8 short | 12V      |

## JP2 (LVDS/EDP selection) settings

| Pin       | JP2  |
|-----------|------|
| 1-2 short | LVDS |
| 2-3 short | EDP  |

SW1 is used to set the resolution of LVDS, and the detailed settings are as follows:




SW1 switch is shown in the figure

1. 2, 3, and 4 represent 1, 5, 6, 7, and 8 represent 0

Example:

The position of the 0011 switch is: 5634



The position of the 0101 switch is: 5274



The position of the 1010 switch is: 1638




The default switch position is 1234, which is 1111



| Switch [4:1] | HA (Pixel) | VA (line) | RR (Hz) | PC (MHz) | CD (bit) | Port           | HB (Pixel) | HSO (Pixel) | HSPW (Pixel) | VB (line) | VSO (line) | VSPW (line) |
|--------------|------------|-----------|---------|----------|----------|----------------|------------|-------------|--------------|-----------|------------|-------------|
| 0000         | 800        | 600       | 60      | 38.25    | 6        | Single         | 224        | 32          | 80           | 24        | 3          | 4           |
| 0001         | 1024       | 768       | 60      | 56.00    | 6        | Single         | 160        | 48          | 32           | 22        | 3          | 4           |
| 0010         | 1280       | 768       | 60      | 68.25    | 6        | Single         | 160        | 48          | 32           | 22        | 3          | 7           |
| 0011         | 1280       | 800       | 60      | 71.00    | 6        | Single         | 160        | 48          | 32           | 23        | 3          | 6           |
| 0100         | 1280       | 960       | 60      | 85.25    | 6        | Single         | 160        | 48          | 32           | 28        | 3          | 4           |
| 0101         | 1280       | 1024      | 60      | 91.00    | 8        | Dual           | 160        | 48          | 32           | 30        | 3          | 7           |
| 0110         | 1366       | 768       | 60      | 72.75    | 6        | Single         | 160        | 48          | 32           | 23        | 3          | 10          |
| 0111         | 1366       | 768       | 60      | 72.25    | 8        | Single         | 160        | 48          | 32           | 23        | 3          | 10          |
| 1000         | 1440       | 900       | 60      | 106.50   | 8        | Dual           | 464        | 80          | 152          | 34        | 3          | 6           |
| 1001         | 1024       | 600       | 60      | 56.00    | 6        | Single         | 160        | 48          | 32           | 22        | 3          | 4           |
| 1010         | 1920       | 1080      | 60      | 138.50   | 6        | Dual 15.6 inch | 160        | 48          | 32           | 31        | 3          | 5           |
| 1011         | 1920       | 1080      | 60      | 138.50   | 8        | Dual 21.5 inch | 160        | 48          | 32           | 31        | 3          | 5           |
| 1100         | 1920       | 1080      | 60      | 138.50   | 8        | Dual 42 inch   | 160        | 48          | 32           | 31        | 3          | 5           |
| 1101         | 1920       | 1200      | 60      | 154.00   | 6        | Dual           | 280        | 48          | 32           | 35        | 3          | 6           |
| 1110         | 1920       | 1200      | 60      | 154.00   | 8        | Dual           | 280        | 48          | 32           | 35        | 3          | 6           |
| 1111         | 1024       | 768       | 60      | 56.00    | 8        | Single         | 160        | 48          | 32           | 22        | 3          | 4           |

3.8.4 power interface (DC\_IN)

1\* adapter power interface is provided on the board, which can support 12V input and output  
Provide 1\* 4-pin power socket, supporting 12V power input and output

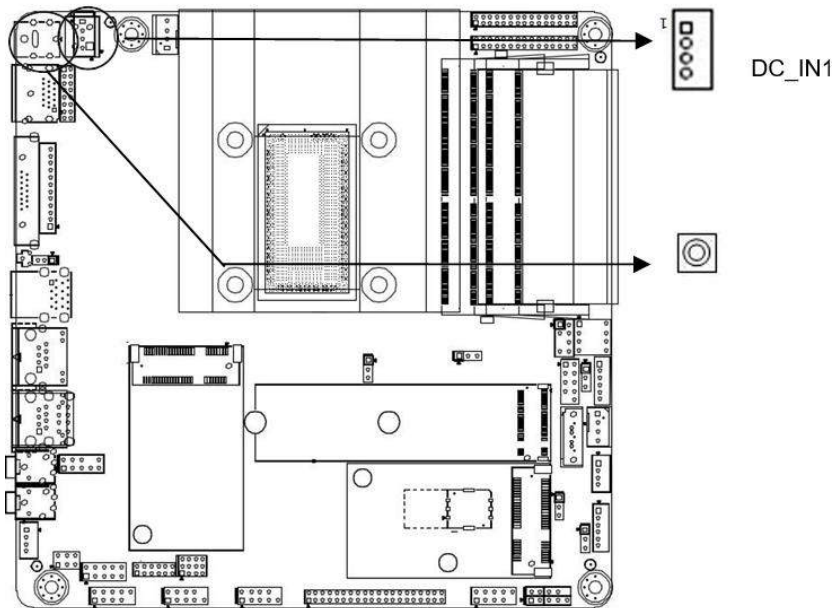


**DC\_IN**

| Pin | signal |
|-----|--------|
| 1   | 12V    |
| 2   | 12V    |
| 3   | GND    |
| 4   | GND    |

**3.8.5 Audio interface (JPHONE1, JMICK1, FP\_AUDIO1, JSPKR1)**

Provide a JPHONE1 and JMICK1 standard audio jack on the board

Built in 1 2 \* 5pin front audio interface and 1 4pin power amplifier interface.

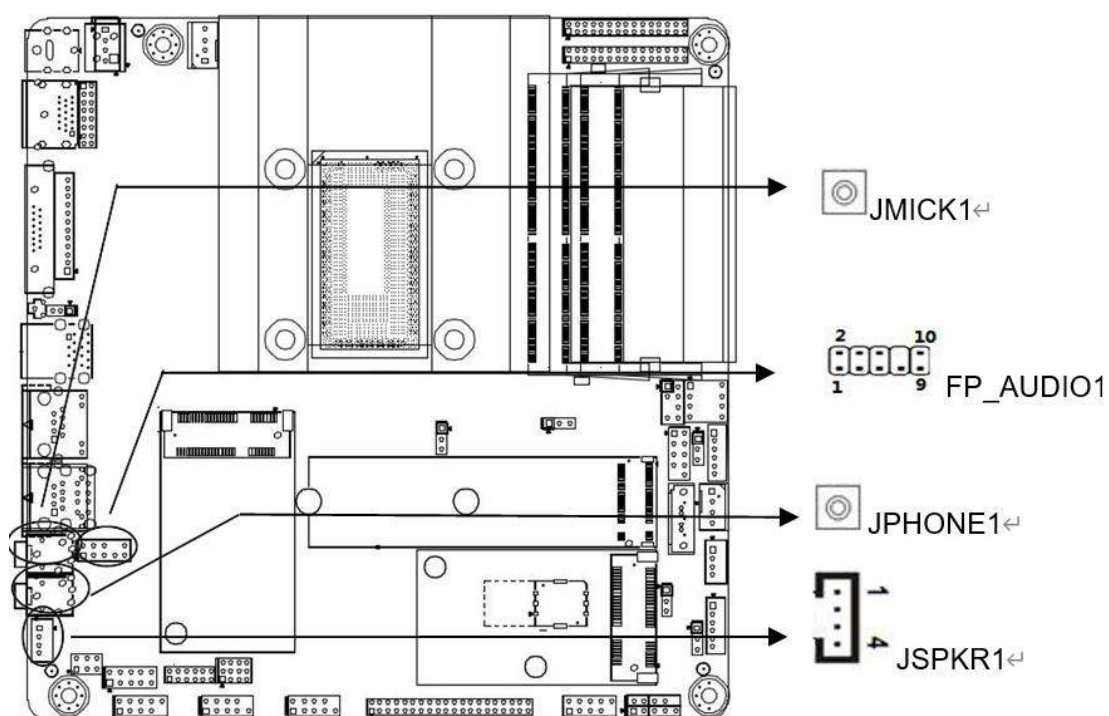**Memory Installation**

This motherboard is equipped with 2 SO-DIMM slots. Please note the following two points when installing a memory module:

**FP\_AUDIO1 (front audio interface)**


| Pin | signal     | Pin | signal        |
|-----|------------|-----|---------------|
| 1   | MIC-L      | 2   | GND           |
| 3   | MIC-R      | 4   | NC            |
| 5   | Line out-R | 6   | Sense Return1 |
| 7   | Sense-FB   | 8   | NC            |
| 9   | Line OUT-L | 10  | Sense Return2 |

**JSPKR1 (power amplifier interface)**

| Pin | signal |
|-----|--------|
| 1   | SPKR+  |
| 2   | SPKR-  |
| 3   | SPKL-  |
| 4   | SPKL+  |

**3.8.6 F\_USB1, F\_USB2, F\_USB3**

Built in 6 \* USB2.0 interface (2.54mm, 2 \* 5pin)

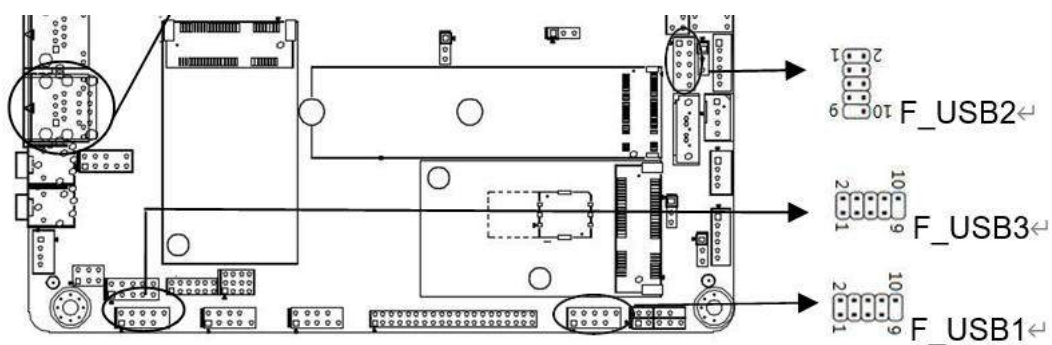


F\_USB1, F\_USB2, F\_USB3 define

| Pin | signal | Pin | signal |
|-----|--------|-----|--------|
| 1   | +5V    | 2   | +5V    |
| 3   | D0-    | 4   | D1-    |
| 5   | D0+    | 6   | D1+    |
| 7   | GND    | 8   | GND    |
| 9   |        | 10  | GND    |

### 3.8.7 Front panel interface (FPANEL1)

2 \* 5pin front panel pin is provided on the board for connecting to the function buttons and indicator lights set on the front panel of the chassis

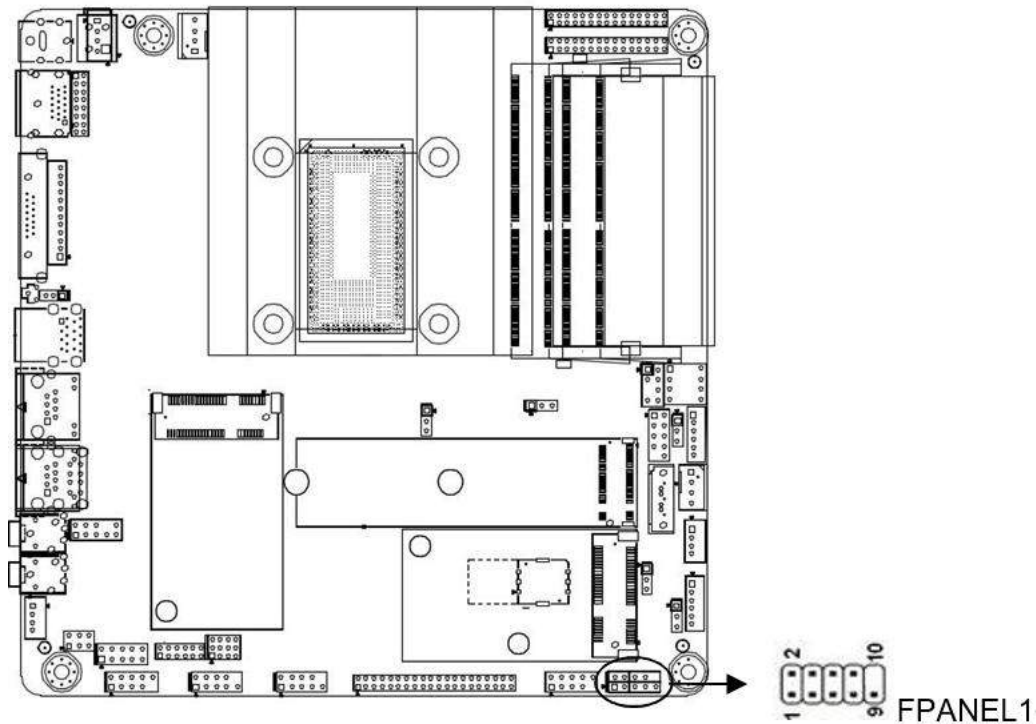

FPANEL define

| Pin | signal    | Pin | signal  |
|-----|-----------|-----|---------|
| 1   | HDDLED+   | 2   | PWRLED+ |
| 3   | HDDLED-   | 4   | PWRLED- |
| 5   | GND       | 6   | PWRBTN# |
| 7   | RESETBTN# | 8   | GND     |
| 9   | NC        | 10  |         |

(1) The hard drive indicator light (pin 1 and pin 3 of the HDD LED are the positive pole of the LED) will flash when the hard drive is performing read and write operations, indicating that the hard drive is running.

(2) The power indicator light (pin 2 and pin 4 POWERLED, pin 2 being the positive pole of the LED) is on when the system is powered on; When the system is powered off, the power indicator light goes out.


(3) When the reset button (pins 5 and 7 RESET BUTTON) fails and the system cannot continue to operate, resetting can restart the system.

(4) The power switch control (6th and 8th pin POWER BUTTON) is connected to the bounce switch on the front panel of the chassis, which can be used to turn on or off the power supply.

### 3.8.8 Programmable input/output port (GPIO1)

Please write a normal GPIO driver in OS (for Windows series, please refer to Microsoft driver related materials, for Linux and Unix, please refer to the relevant Linux driver framework model), and use the GPIO driver to drive the GPIO module, hereinafter referred to as the driver.

The GPIO1 module consists of 5 sets (10) rows of pins (refer to the motherboard), with pins 1, 2, 3, 4, 5, 6, 7, and 8 leading out as Simple GPIO, code 9 as GND, code 10 as +5V, and singular number (1, 3, 5, 7) are the signal input pin rows, and the double numbered (2, 4, 6, 8) are the signal output pin rows:

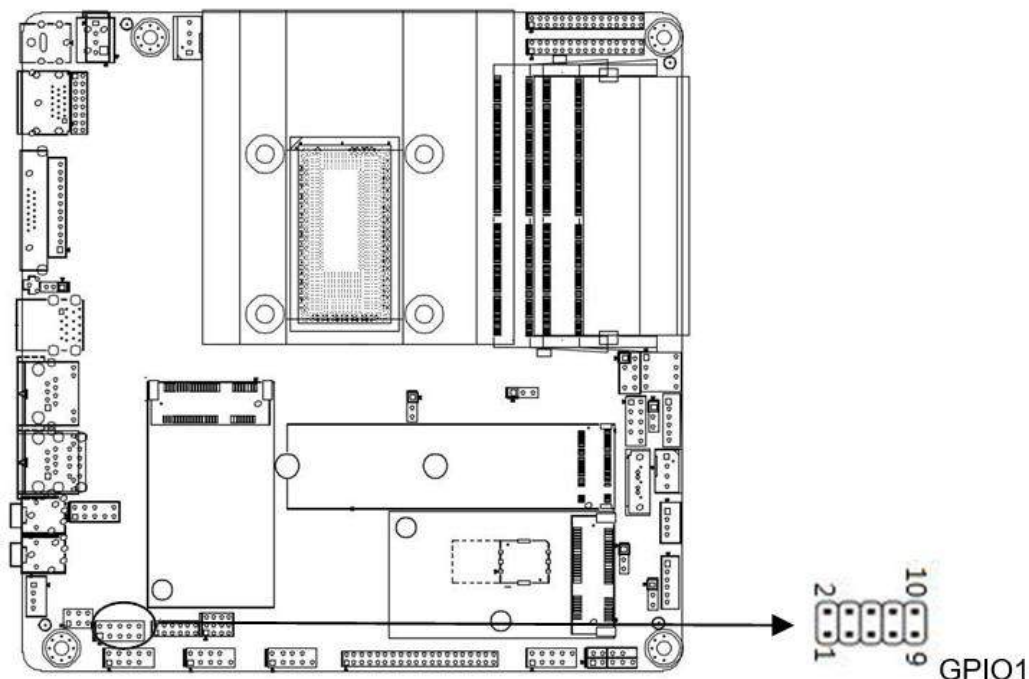


#### GPIO1 define

| Pin | signal | Pin  | signal                      |
|-----|--------|------|-----------------------------|
| 1   | Input  | High |                             |
| 2   | Output | Low  | Determined by BIOS settings |
| 3   | Input  | High |                             |
| 4   | Output | Low  | Determined by BIOS settings |
| 5   | Input  | High |                             |
| 6   | Output | Low  | Determined by BIOS settings |
| 7   | Input  | High |                             |
| 8   | Output | Low  | Determined by BIOS settings |
| 9   | GND    |      |                             |
| 10  | +5V    |      |                             |


### 3.8.9 Mini PCIe interface (MINIPE1, mSATA1, SSD1)

The motherboard is equipped with one Mini PCIe slot built-in, supporting WIF/4G/I modules

Built-in 1 MSATA slot, supporting Intel protocol SSD solid-state drive, with a transmission speed of up to 6Gbps, built-in 1 \* M.2 slot, supporting M.2 2260/2280 Nvme PCIe4/SATA adaptive standard SSD

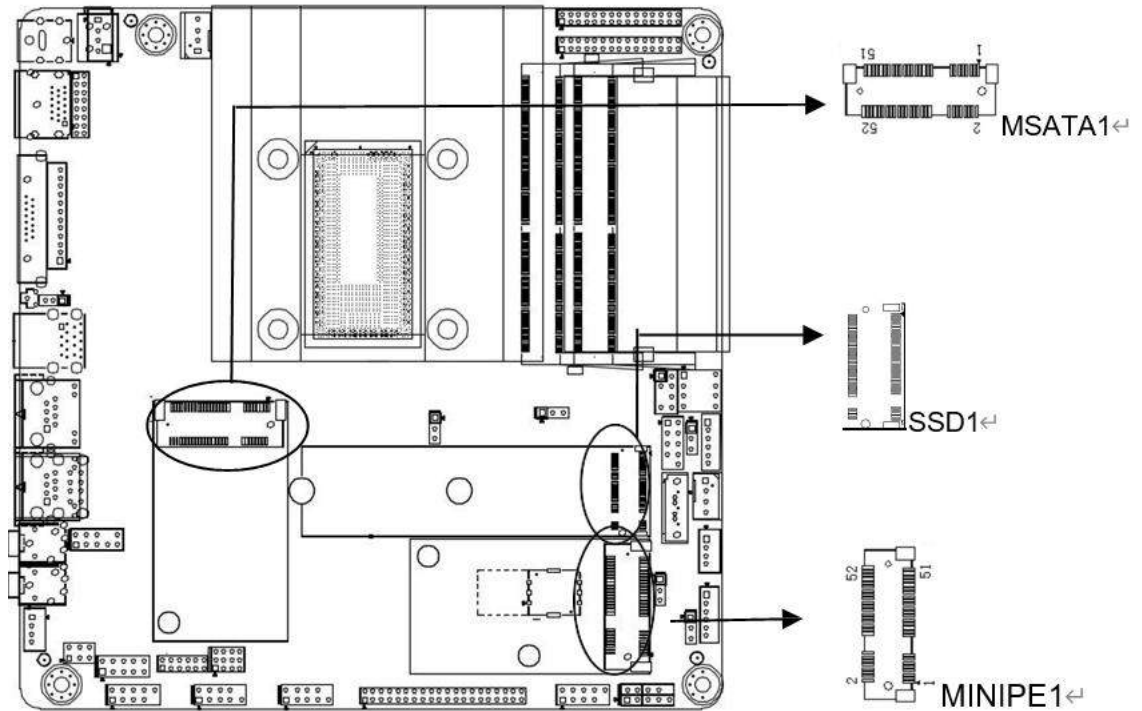

## Chapter 4. System Utilities



## 4. System Utilities

BIOS (Basic Input and Output System) records the setting parameters of various hardware devices in the system through the CMOS chip on the motherboard. BIOS includes a BIOS setup program for users to set system parameters as needed to ensure that the motherboard functions properly or performs specific functions.

The relevant settings modified through the BIOS Setup program (except for date and time) are saved in the flash memory of the system. The power required to memorize CMOS data is supplied by the battery on the motherboard. Therefore, when the system power is turned off, these data will not be lost. When the power is turned on again, the system can read these set data. When unable to access the Setup interface due to incorrect operation, to restore factory settings, please short circuit JBAT1 2 and 3 pins to clear CMOS content.

**Attention!** The BIOS settings directly affect the performance of the computer. Setting incorrect parameters can cause damage to the computer and even prevent it from turning on. Please use the built-in default values in the BIOS to restore normal system operation.

Due to the slight differences in the settings interface between different products of our company, the following screen is for your reference and may not be completely the same as the BIOS setup program you are currently using.


### 4.1 BIOS Basic Function Settings

#### 4.1.1 Enter the BIOS interface


Follow these steps to enter the BIOS interface:

1. Turn on the power and the display screen will display a POST interface.
2. When the prompt "Press<DEL>or<ESC>to enter setup" appears on the screen, press<DEL>or<ESC>key to enter the BIOS setup program.
3. Use the arrow keys<↑><↓><←><→>to move to the option you want to modify, and press the<Enter>key to enter the sub screen of the option.
4. Use the arrow keys and<Enter>key to modify the value of the selected item. Press Enter to select the BIOS option and modify it.
5. Use<Esc>to exit the main menu without saving changes, submenu to exit the current page and return to the main menu.
6. <Page Up/+>Add numerical values or change  
<Page Down/->Reduce numerical values or change  
<F1>Settings submenu help  
<F9>Set to default value (optimized to factory settings)  
<F10>Save BIOS settings

Note: 1. For BIOS that supports hard disk UEFI mode, hard disk information cannot be seen in BBS, but it can be viewed in SATA Configure in BIOS to access the hard disk information. The following are the details

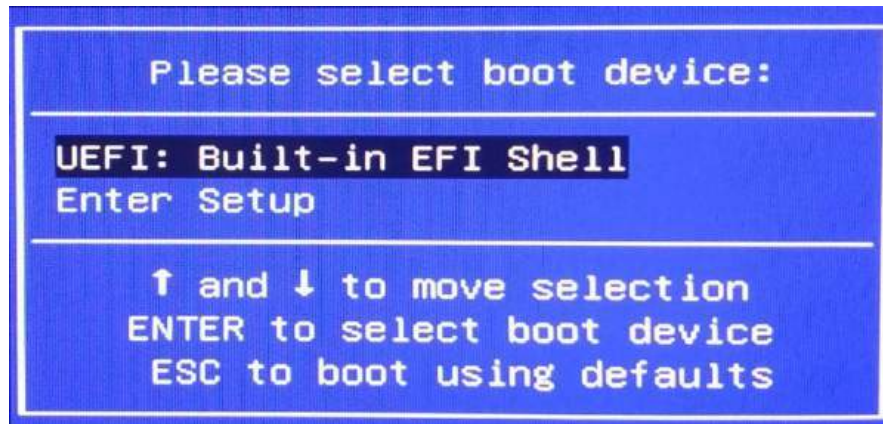

2. After installing the UEFI system, you can view the system boot information ex: Windows Boot Manager (hard disk information) in BBS

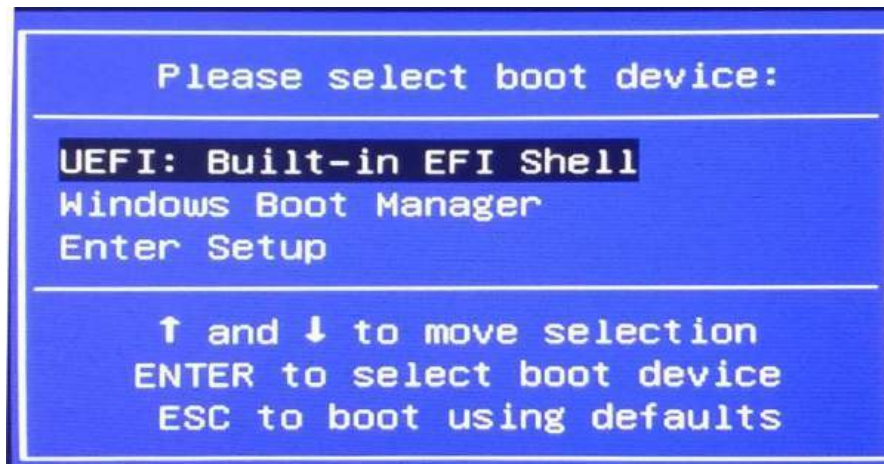


## 4.2 MIAN Menu (BIOS information and time date)



1. BIOS ID: BIOS version
2. Build Date and Time: BIOS time date
3. System Date:
4. Set the current date. Expressed in month/day/year format. The setting range is: Month/Month (Jan. Dec.),
5. Date/day (01-31), Year/year (up to 2099), Week/week (Mon. to Sun.). System Time:
6. Set the current time. Represented in hours/minutes/seconds format. The setting range is: Hour/hour (00-23), Minute/minute (00-59), Second/second (00-59).

### 4.3 Advance (Advanced Menu Settings)

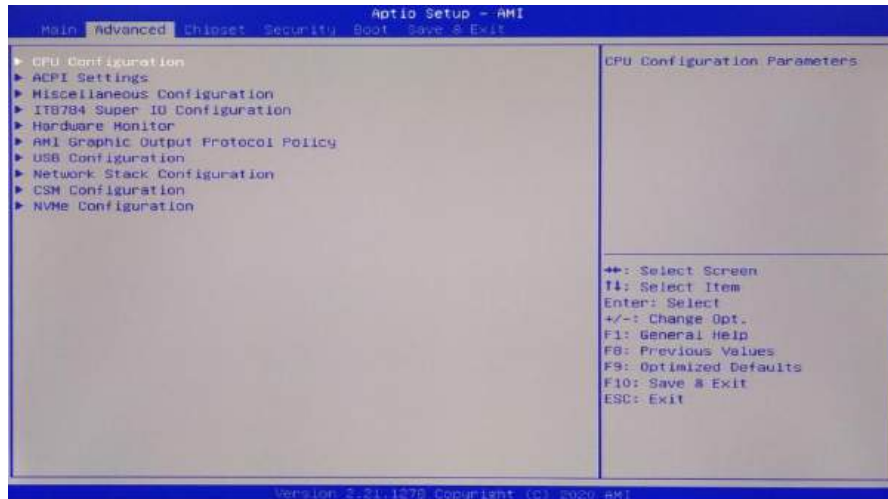


1. CPU Configuration: CPU parameter information and common setting options.
2. ACPI Settings: Advanced configuration and power management interface settings.
3. Miscellaneous Configuration: Miscellaneous management, including setting scheduled startup, power on startup, watchdog IT8613E Super IO Configuration: Super IO configuration information, including COM port interrupt number and address settings.
4. Hardware Monitor: System monitoring, hardware monitoring, hardware monitor USB Configuration: USB information and control options.
5. CSM Configuration: CSM Configuration

### 4.4 CPU Configuration



1. The read-only item contains detailed information about the CPU, including CPU manufacturer, model, frequency, primary cache size, secondary cache size, and other information.
2. Intel Virtualization Technology:
3. Intel Virtualization Technology is a system virtualization technology used in Intel's CPUs. It enables multiple OSs to run on one PC, and VT technology is about to play a very important role in various types of processors (including dual core processors). This technology enables processors to have and/or virtualization technology, and using Vanderpool Technology, we can run two operating systems simultaneously on the same machine. One processor runs one operating system, while the other processor runs another operating system.
- 4.

## 4.5 ACPI Settings

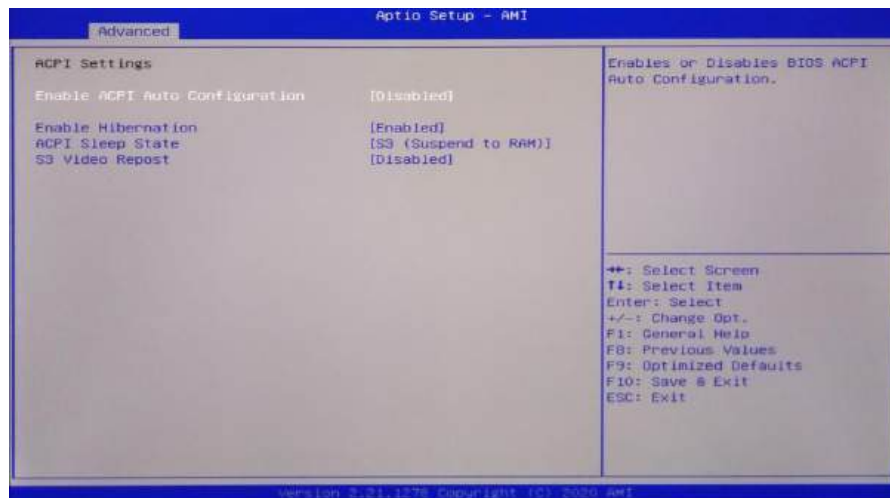

1. Enable ACPI Auto Configuration: This item is for ACPI automatic configuration. Enable or disable
2. (Disabled) ACPI automatic configuration of BIOS. The default is Disabled.
3. Enable Hibernation: This item supports starting hibernation. Enable or disable the system sleep function (OS/S4 sleep state). This option does not take effect in some OSs. The default is enabled.  
ACPI Sleep State: This option is used to select the power-saving mode that the system enters during sleep. If the mode is different, the system's power consumption level will also be different.  
Suspend Disabled; Turn off sleep mode: S1 (CPU Stop Clock): The CPU stops working and other devices are still powered on normally; S3 (Suspend to Ram): Suspend to memory.
4. Lock Legacy Resources: Resource locking, allowing (enabled) or disabling (disabled) resource locking functionality.

## 4.6 Miscellaneous Configuration



1. Resume On RTC Alarm: Set timed startup
2. RTC Alarm Date (Days): Set timed startup date
3. RTC Alarm Time (Hours): Set timed startup hours
4. RTC Alarm Time (Minutes): Set timed startup minutes
5. RTC Alarm Time (Seconds): Set timed startup seconds



**Restore AC Power Loss:** This item is used to set the startup status after powering on. If you select Power Off, you need to press the power button to start up after powering on. If you select Power On, you can directly start up after powering on. If you select Last State, you will decide whether to power on and start up based on the last set value




Watch dog controller: watchdog setting, [Disabled] to turn off watchdog, [Second mode] to set watchdog to second mode, [Minute mode] to set watchdog to minute mode

## 4.7 Super IO Configuration



Serial Port 1 Configuration: This is the option for setting serial interface 1, including Super IO configuration information, including COM port interrupt number and address settings.

## 4.8 PC Health Status

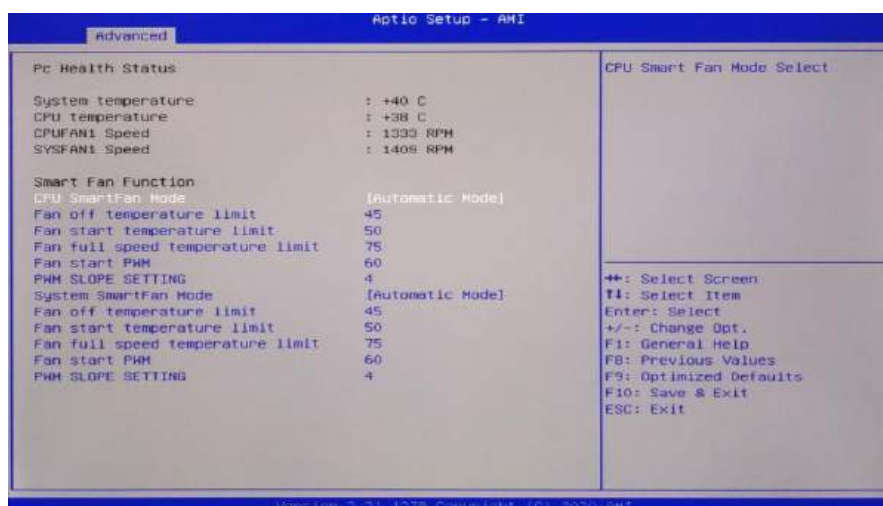

1. PC Health Status: Hardware security detection, displaying the current system temperature, CPU temperature, fan speed, and other related voltage values. The above parameters all have a certain range, and the system cannot operate beyond these ranges.
2. Smart Fan 1 Mode: This option enables the CPU automatic fan control function, which is used to automatically adjust the CPU fan speed based on the real-time detected CPU temperature, thereby achieving the goal of power saving and energy saving.
3. Fan off temperature limit: The minimum temperature setting for fan off. Fan start temperature limit: Set the minimum temperature value at which the fan is turned on. Fan start PWM: The value setting of the fan's start PWM.
4. Pwm slope setting: The linear value of Pwm.

## 4.9 CSM Configuration



Network: Set diskless startup, Do not launch: Turn off diskless startup, Legacy: Set diskless startup mode to Legacy mode, UEFI: Set diskless startup mode to UEFI mode

## 4.10 USB Configuration




1. Legacy USB Support:
2. This item is used for setting up older versions of USB. If you need to support USB devices such as USB drives, USB keyboards, etc. in DOS, you need to set this item to [Enabled] or [Auto]. Otherwise, select [Disabled].
3. XHCI Hand off: When the operating system does not support XHCI, should the BIOS take over XHCI control

4. USB Mass Storage Driver Support:
5. USB mass storage devices support switches.

## 4.11 Chipset


C

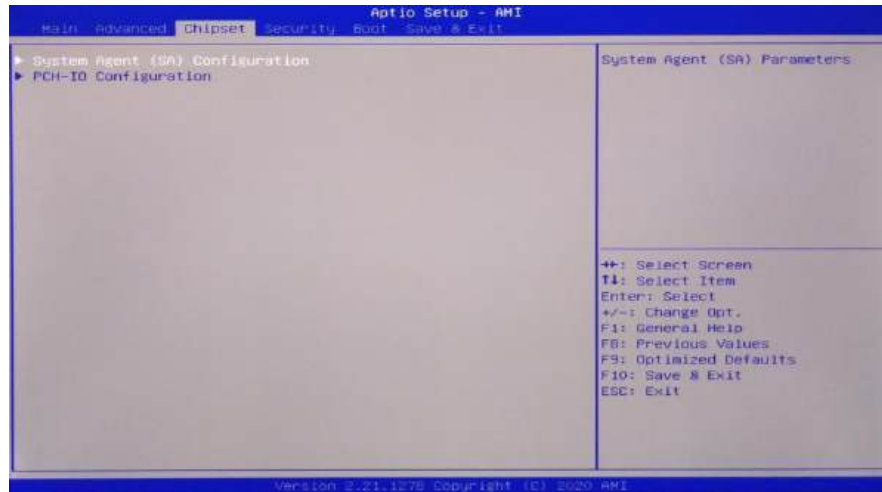

1. PCH-IO Configuration:
2. South Bridge Configuration Options. Including options such as sound card, network card, and automatic start upon call
3. System Agent (SA) Configuration:
4. North Bridge Configuration Options. Includes options such as graphics memory, display devices, and LVDS.



1. Intel's I/O virtualization technology requires chipset support, so some chipsets support it while others do not. BIOS will display or hide this option based on different chipsets. Please enable it when installing virtual machines.
2. Memory Configuration: Memory Configuration Graphics Configuration: Graphics Card Configuration

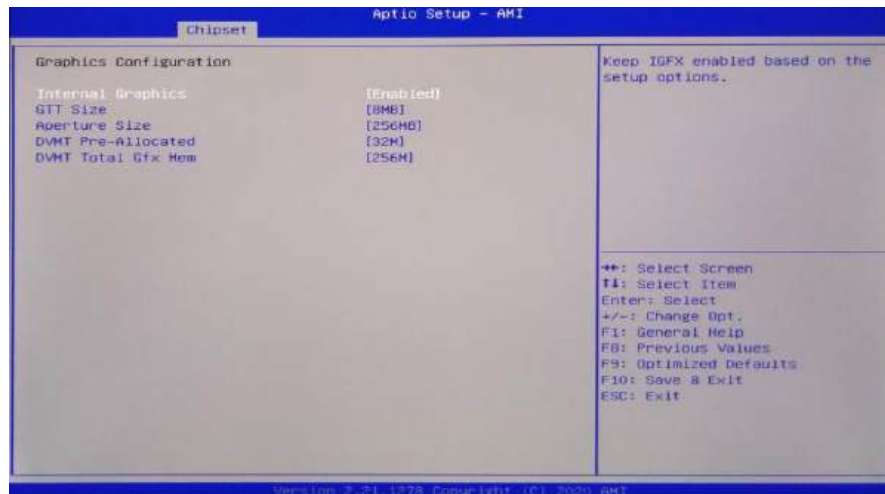

1. GTT Size: graphics memory size
2. DVMT Pre Allocated: Dynamically allocate the value of video memory.
3. DVMT Total Gfx Mem: Dynamically allocate the total value of the graphics card.
4. Aperture Size: Display the size of the card's shared main memory



1. SATA And RST Configuration: SATA Configuration
2. SATA Mode Selection: Hard disk mode setting option.
3. SATA Controller speed: hard drive control speed
4. Serial ATA Port 0: Serial Port 0 (on or off).
5. Serial ATA Port 1: Serial Port 1 (on or off).

## 4.12 Boot



1. Setup Prompt timeout: Set the timeout time for the prompt, and press the setup shortcut key to wait for a longer time. If you do not press the Setup shortcut key within the set time, continue to start.
2. Bootup Numlock State: This feature allows the activation of the numeric lock function on the keypad after the system is powered on to the DOS system. The default value is On, which means the system is in digital lock mode when starting. Set to Off and the keypad will be in cursor control mode during startup.
3. Quiet Boot: Silent start (off, enable on).
4. Fast Boot: Quick start (Disabled off, enabled on).
5. New Boot Option Priorities: The system will detect devices in the set order until a bootable device is found, and then boot from that device. # 1 is the highest priority boot device among the boot options.

## 4.13 Security



1. Password character length prompt: The minimum length is 3, and the maximum length is 20.
2. Administrator Password:
3. This prompt line is used to set the super user password.

## 4.14 Save&Exit



1. Save Changes and Reset: Save BIOS settings and exit the settings interface to continue booting the computer.
2. Discard Changes and Reset: Discard changes and exit the settings interface, restart the computer.
3. Restore Defaults: Load optimization settings. If this option is selected, the system will set according to the factory optimization values
4. Boot Overrides: Select the specified boot device, such as SATA hard drive, USB flash drive, EFI Shell, PXE, etc., to directly boot without saving and exit. Press F11 to select the specified device Boot.

## **Chapter 5. Machine Disassembly and Replacement**



## 5. Machine Disassembly and Replacement

1. To disassemble the computer, you need the following tools:
2. Wrist grounding strap and conductive mat for preventing electrostatic discharge.
3. Wire cutter.
4. Phillips screwdriver (may require different size).

**NOTE:** The screws for the different components vary in size. During the disassembly process, group the screws with the corresponding components to avoid mismatches when putting back the components.

## Chapter 6. Standard Assembly Process



## 6. Standard Assembly Process

### 6.1 LCD Assemble


#### 6.1.1 Assemble the LCD bracket



#### 6.1.2 Assemble the LCD bracket




### 6.1.3 Assemble the Rear housing

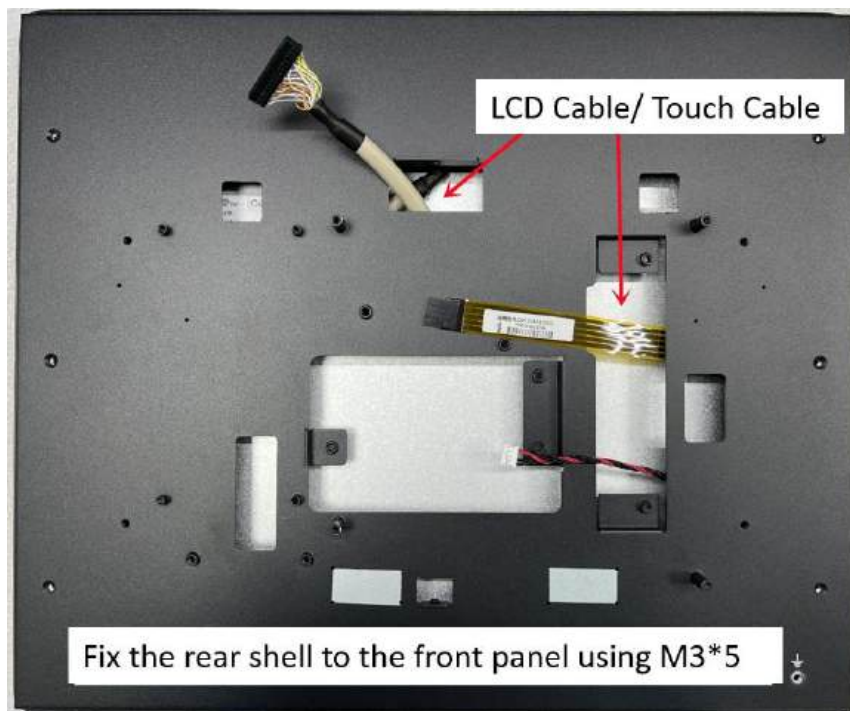


## 6.2 Assemble the M/B


### 6.2.1 LCD voltage and display settings

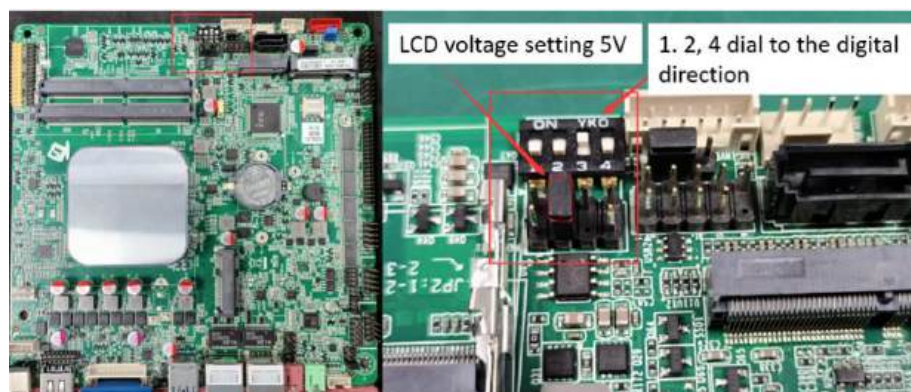


### 6.2.2 Assembly extension interface

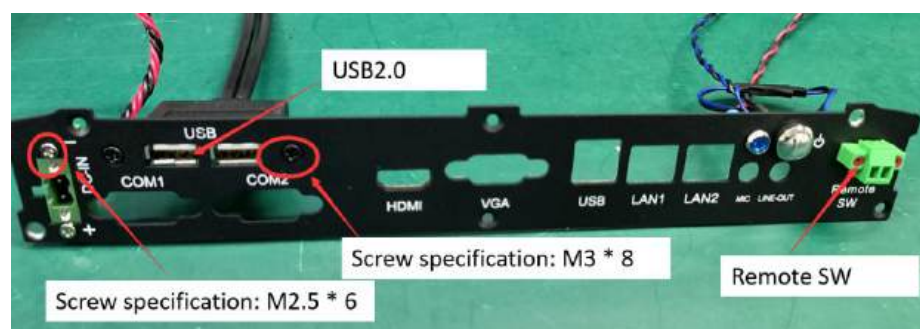

### 6.2.3 Assembly function Cable

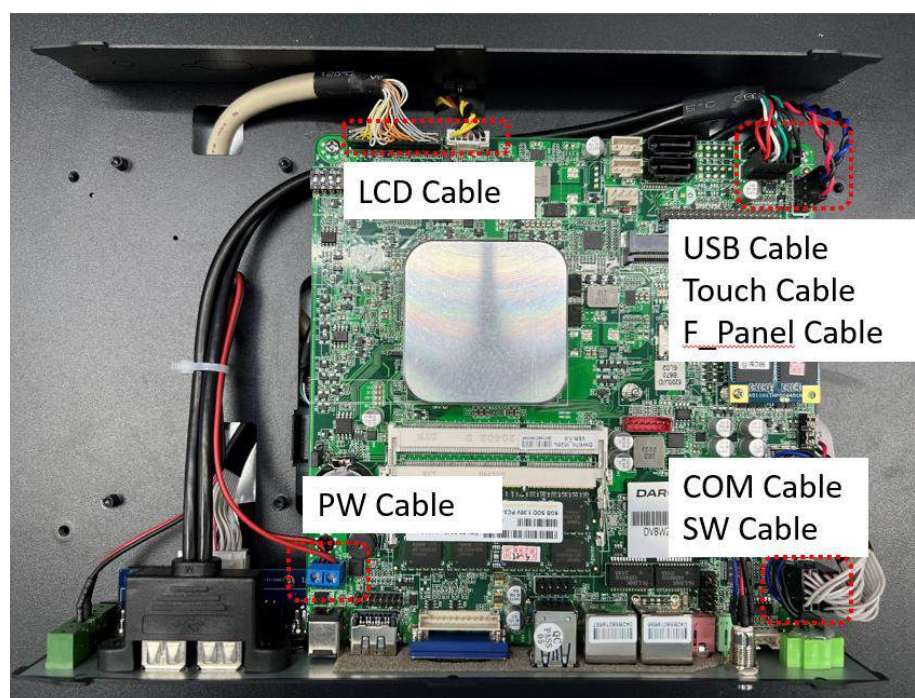


#### 6.2.4 Assembly Heat dissipation aluminum profiles

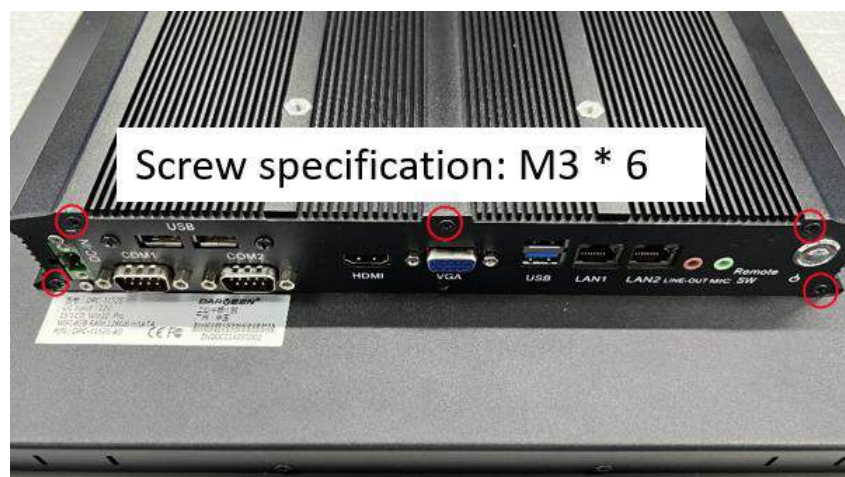


## Chapter 7. Appendix

# 7.Appendix

## 7.1 Material List

| CATEGORY                                                                            | PARTNAME           | PART NO.               |
|-------------------------------------------------------------------------------------|--------------------|------------------------|
| <b>Structure</b>                                                                    |                    |                        |
|    | Heatsink, Aluminum | A.03.002.000363        |
|   | IO COVER           | A.03.001.001302        |
|  | COVER              | A.03.001.000745        |
|  | DPC-9170-HK        | <b>A.03.001.001718</b> |

| CATEGORY                                                                           | PARTNAME               | ACER PART NO.   |
|------------------------------------------------------------------------------------|------------------------|-----------------|
| <b>Structure</b>                                                                   |                        |                 |
|   | DPC-9170-LCD           | A.03.001.001719 |
|   | DPC-9170-QK            | A.03.002.000781 |
| <b>MAINBOARD</b>                                                                   |                        |                 |
|  | M/B (I5-10210U)1.6GHz. | A.03.008.000243 |
| <b>Display</b>                                                                     |                        |                 |
|                                                                                    | LCD                    | A.03.006.000040 |
|                                                                                    | IC SLAC-LED-2. 1V      | A.03.008.000238 |
|                                                                                    | Capacitive Touch Panel | A.03.007.000059 |
|                                                                                    | Touch IC               | A.03.008.000228 |

| CATEGORY           | PARTNAME       | ACER PART NO.   |
|--------------------|----------------|-----------------|
| <b>SDD/ MEMORY</b> |                |                 |
|                    | SSE128GTLC9-SB | C.02.002.000183 |
|                    | DDR4,8G        | C.02.002.000230 |

| CATEGORY                        | PARTNAME                                                                      | ACER PART NO.   |
|---------------------------------|-------------------------------------------------------------------------------|-----------------|
| <b>POWER SUPPLY/ POWER CORD</b> |                                                                               |                 |
|                                 | 220VAC Input, 12VDC/7A Output,Huntkey<br>HKA09012070-7U, Phoenix 2P Connector | C.02.009.000094 |
|                                 | POWER Cable                                                                   | C.02.099.000010 |

